


CHESTER HOIST

WORM DRIVE HOIST
DATA SHEET E-207AS

CAPACITY 4-5-6 TON

STANDARD HEADROOM
LUG TYPE-S

TWIN HOOK MONORAIL
4-PART SINGLE

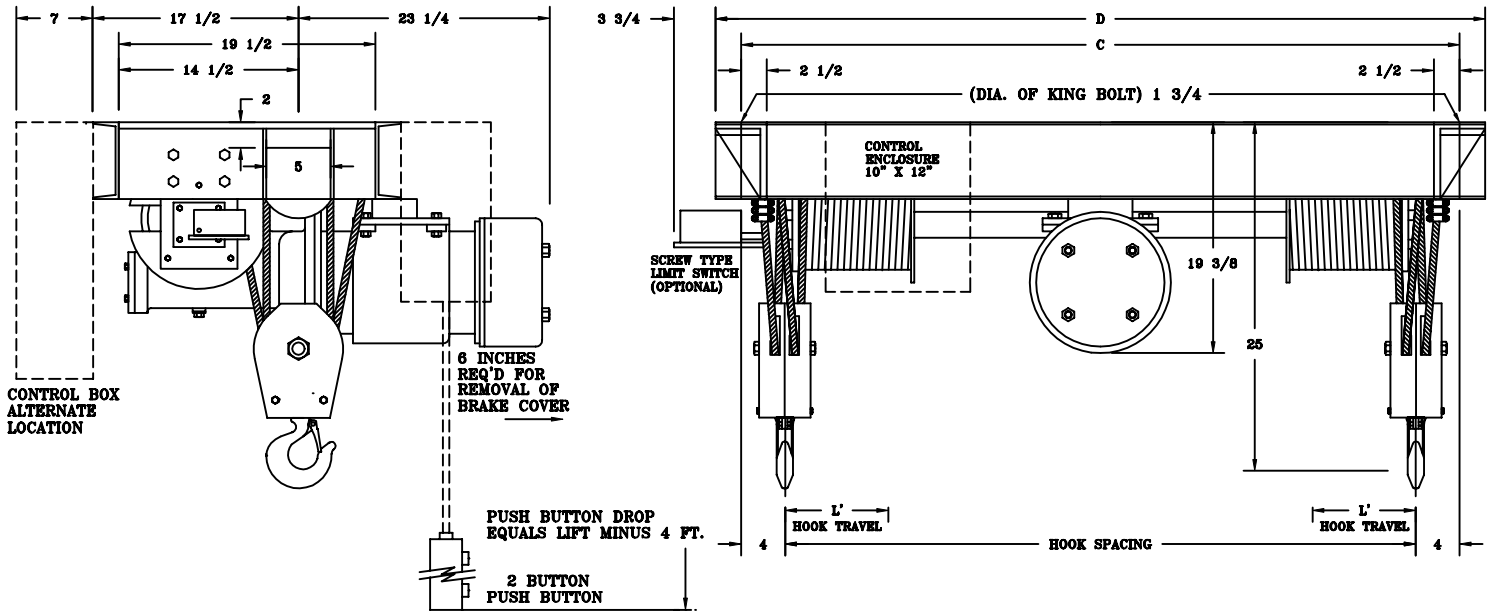

ALL DIMENSIONS IN INCHES

MODEL NUMBER	CAPACITY (lbs.)	SPEED (fpm)	LIFT (ft.)	REEVING	MOTOR (hp)	C	D	L'	MAX. HOOK SPACING	MIN. HOOK SPACING	APPROX. WT. (lbs.)
WD-380S	8000	15	15	4PS-1/4	6 @ 1800	45	48	3	96	37	1000
WD-381S	8000	15	30	4PS-1/4	6 @ 1800	63	66	5 1/4	96	55	1150
WD-382S	8000	15	45	4PS-1/4	6 @ 1800	80	83	7 1/4	96	72	1300
WD-3100S	10000	10	15	4PS-5/16	5 @ 1200	45	48	3	96	37	1000
WD-3101S	10000	10	30	4PS-5/16	5 @ 1200	63	66	5 1/4	96	55	1150
WD-3102S	10000	10	45	4PS-5/16	5 @ 1200	80	83	7 1/4	96	72	1300
WD-3103S	10000	15	15	4PS-5/16	7 1/2 @ 1800	45	48	3	96	37	1000
WD-3104S	10000	15	30	4PS-5/16	7 1/2 @ 1800	63	66	5 1/4	96	55	1150
WD-3105S	10000	15	45	4PS-5/16	7 1/2 @ 1800	80	83	7 1/4	96	72	1300
WD-3120S	12000	10	15	4PS-5/16	6 @ 1200	45	48	3	96	37	1000
WD-3121S	12000	10	30	4PS-5/16	6 @ 1200	63	66	5 1/4	96	55	1150
WD-3122S	12000	10	45	4PS-5/16	6 @ 1200	80	83	7 1/4	96	72	1300

"C" DIMENSION AND WEIGHTS BASED ON MIN. HOOK SPACING
NOTE: WHEN USING SCREW TYPE LIMIT SWITCH ADD 1 INCH TO HEADROOM.